



PBX-55022



Solid Sizes



Optional parts


Float switch

When fitted with a (separately available) float switch, the pump can operate fully automatic.




Effective Motor Cooling System

Water is channeled through the outer wall to cool the motor for maximum endurance.

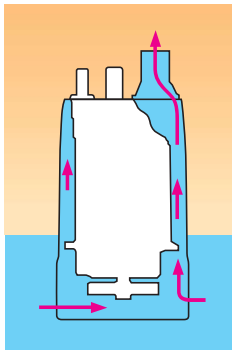

Performance Curve

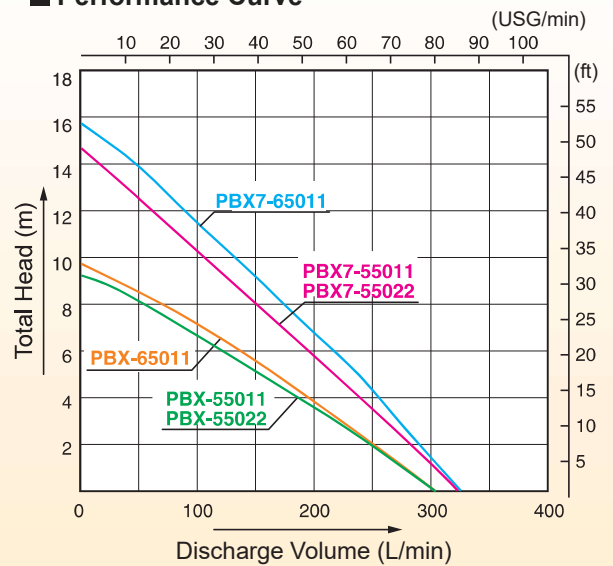

Specification

Model		PBX-55022	PBX-55011	PBX-65011	PBX7-55022	PBX7-55011	PBX7-65011	
PUMP	Connection Dia	50 mm (2")						
	Total Head	9.5 m (31 ft)		10 m (32.8 ft)	15 m (50 ft)		16 m (54 ft)	
	Discharge Volume	310 L/min (4870 GPH)			330 L/min (5240 GPH)			
MOTOR	Voltage	AC 220 V		AC 110 V		AC 220 V		AC 110 V
	Frequency	50 Hz		60 Hz		50 Hz		60 Hz
	Rated Current	4.2 A	8.1 A	8.7 A	6.0 A	12.0 A		
	Output		400 W			750 W		
	Consumption	680 W	690 W	750 W	1250 W			
	Revolution	2800 rpm		3200 rpm		2800 rpm		3200 rpm
	Type	Condenser Induction Motor						
	Power Cord	6 m (19.7 ft) or 10 m (32.8 ft)						
	Net Weight	15 kg (33 lbs)	15.5 kg (34 lbs)	15 kg (33 lbs)	15.5 kg (34 lbs)		16.5 kg (36 lbs)	
Gross Weight	16 kg (35 lbs)	16.5 kg (36 lbs)	16 kg (35 lbs)	16.5 kg (36 lbs)		17.5 kg (37 lbs)		
Dimensions L×W×H (mm)	245 × 245 × 450							
Packing Unit	1							