


Complete Range of Water Pumps Powered by Honda Engine



Performance Curve

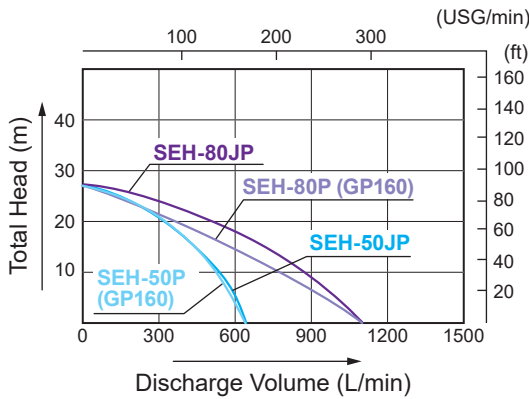

* Performance ratings are guaranteed minimum, not inflated maximum.



SEH-50JP



SEH-80P

Specification

Model	SEH-50JP	SEH-80JP	SEH-50P	SEH-80P	
PUMP	Connection Dia	50 mm (2")	80 mm (3")	50 mm (G2")	80 mm (G3")
	Connection Thread	Outer Pipe Thread BSP			
	Total Head	27 m (88 ft)			
	Discharge Volume	640 L/min (169 USG/min)	1100 L/min (290 USG/min)	640 L/min (169 USG/min)	1100 L/min (290 USG/min)
	Max. Suction Lift	8 m (26 ft)			
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine			
	Model	Honda GP160			
	Displacement	163 cc			
	Rated Output	2.9 kW (3.9 PS) / 3600 rpm			
	Max. Output	3.6 kW (4.9 PS) / 3600 rpm			
	Fuel	Automotive Unleaded Gasoline			
	Fuel Tank Capacity	3.1 L (0.8 USG)			
	Continuous Operating Time	Approx. 2.5 hrs	Approx. 2.2 hrs	Approx. 2.5 hrs	Approx. 2.2 hrs
	Starting Method	Recoil Starter			
	Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set			
Net Weight	24 kg (52.9 lbs)	26.1 kg (57.5 lbs)	24.2 kg (53.3 lbs)	26.7 kg (58.8 lbs)	
Gross Weight	26 kg (57.3 lbs)	28.8 kg (63.4 lbs)	26.2 kg (57.7 lbs)	29.5 kg (65.0 lbs)	
Dimensions L×W×H (mm)	504 × 401 × 406	543 × 425 × 425	521 × 400 × 411	543 × 425 × 425	
Packing Unit	1				