

Clear Water Pumps


Outstanding Features

- ▶ Powerful Engine
- ▶ 8m Suction Lift
- ▶ Easy to Carry with Compact and Light-weight Body



SEV-50E

Performance Curve

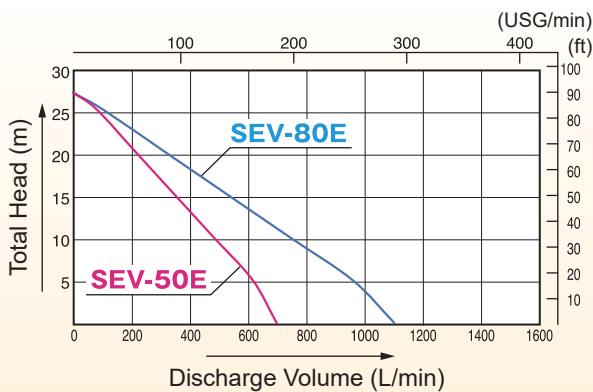

SEV-80E

Specification

Model		SEV-50E	SEV-80E
PUMP	Connection Dia	50 mm (2")	80 mm (3")
	Connection Thread	Outer Pipe Thread BSP	
	Total Head	27 m (88 ft)	
	Discharge Volume	670 L/min (177 USG/min)	1100 L/min (290 USG/min)
	Max. Suction Lift	8 m (26 ft)	
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine	
	Model	Koshin K210S	
	Displacement	209 cc	
	Rated Output	3.7 kW (5.0 PS) / 3600 rpm	
	Max. Output	4.3 kW (5.8 PS) / 3600 rpm	
	Fuel	Automotive Unleaded Gasoline	
	Fuel Tank Capacity	Tank size: 3.3 L (0.87 USG), Usage level: 2.6 L (0.68 USG)	
	Continuous Operating Time	Approx. 1.4 hrs	Approx. 1.3 hrs
	Starting Method	Recoil Starter	
	Standard Accessories	1 Strainer, 2 Coupling set, 3 Hose bands, 1 Engine Tool	
Net Weight	21.9 kg (48.3 lbs)	24.4 kg (53.7 lbs)	
Gross Weight	23.9 kg (52.7 lbs)	26.8 kg (59.0 lbs)	
Dimensions L×W×H (mm)	504 × 405 × 411	543 × 425 × 425	
Packing Unit	1		