



Complete Range of Water Pumps Powered by Honda Engine

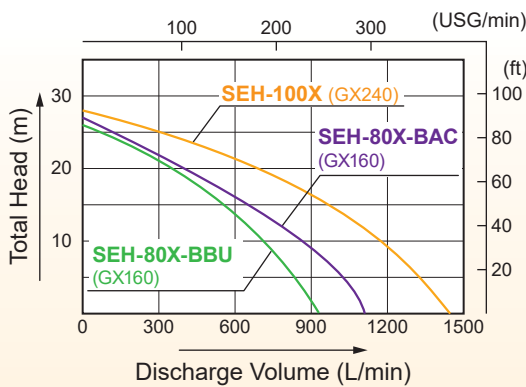

Performance Curve

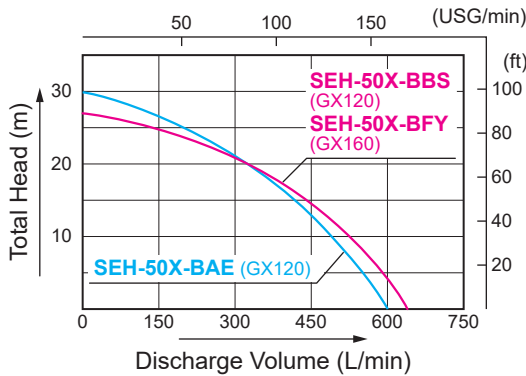

SEH-50X



SEH-80X

Specification

Model	SEH-50X-BAE	SEH-50X-BBS	SEH-50X-BFY	SEH-80X-BBU	SEH-80X-BAC	SEH-100X
Connection Dia	50 mm (2")			80 mm (3")		100 mm (4")
Connection Thread	Outer Pipe Thread BSP or NPT					
Total Head	30 m (98 ft)	27 m (88 ft)		26 m (85 ft)	27 m (88 ft)	28 m (92 ft)
Discharge Volume	600 L/min (158 USG/min)	640 L/min (169 USG/min)		930 L/min (246 USG/min)	1100 L/min (290 USG/min)	1450 L/min (383 USG/min)
Max. Suction Lift	8 m (26 ft)					
Impeller	FC200					
Volute Casing	ADC12	FC200		ADC12	FC200	
Type	Forced Air-cooled 4-stroke Gasoline Engine					
Model	Honda GX120			Honda GX160		Honda GX240
Displacement	122 cc			163 cc		270 cc
Rated Output	2.1 kW (2.9 PS) / 3600 rpm			2.9 kW (3.9 PS) / 3600 rpm		4.6 kW (6.3 PS) / 3600 rpm
Max. Output	2.4 kW (3.3 PS) / 3600 rpm			3.6 kW (4.9 PS) / 3600 rpm		5.9 kW (8.0 PS) / 3600 rpm
Fuel	Automotive Unleaded Gasoline					
Fuel Tank Capacity	2.0 L (0.53 USG)			3.1 L (0.82 USG)		5.3 L (1.4 USG)
Continuous Operating Time	Approx. 2 hrs					Approx. 2.5 hrs
Starting Method	Recoil Starter					
Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set					
Net Weight	21 kg (46.3 lbs)	21 kg (46.3 lbs)	25.2 kg (56.2 lbs)	25.9 kg (57.0 lbs)	28 kg (61.7 lbs)	54 kg (119 lbs)
Gross Weight	22 kg (48.5 lbs)	23 kg (50.7 lbs)	27.2 kg (59.9 lbs)	29 kg (63.9 lbs)	30 kg (66.0 lbs)	59 kg (130 lbs)
Dimensions L×W×H (mm)	483 × 375 × 376		504 × 401 × 406	543 × 425 × 425	525 × 389 × 463	680 × 490 × 675
Packing Unit	1					