

# Environment Friendly Low Noise

\* Engine noise are half of 2-stroke engine.



SEH-25H





SEH-25L



SEM-25L

## Performance Curve

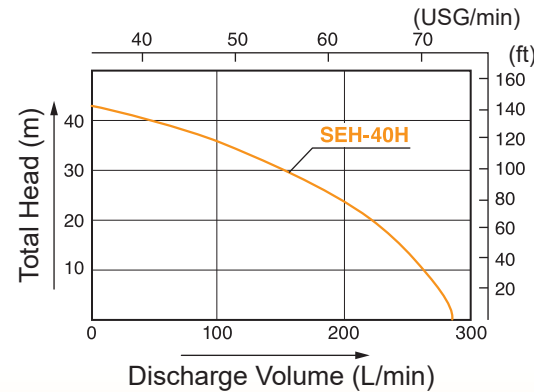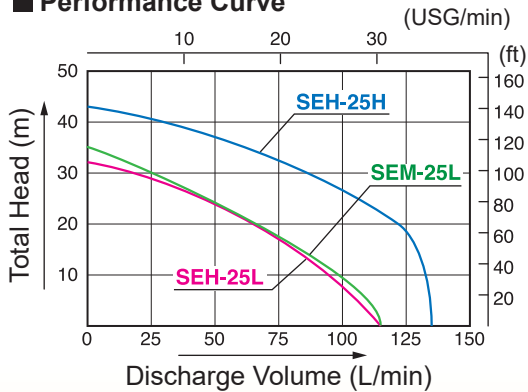

## Available 25 mm Hose Set

### N-Type Hose Set

- Washing of agriculture & construction machinery



- 1 Discharge hose <8 m (26 ft)>
- 1 Nozzle (Jet)

### R-Type Hose Set

- Washing of agriculture machinery
- Water sprinkling to the field



- 1 Discharge hose <8 m (26 ft)>
- 1 Nozzle (Jet & Mist)

## New Spray Nozzle



### SJ-20

- Large volume of spraying water

- 1 Coupling set <20 mm (¾")>
- 1 Hose nipple <20 mm (¾") × 15 mm (½")>



## Specification

Model	SEH-25L	SEH-25H	SEH-40H	SEM-25L	
PUMP	Connection Dia	25 mm (1")		25 mm (1")	
	Connection Thread	Outer Pipe Thread BSP or NPT			Outer Pipe Thread BSP
	Total Head	32 m (105 ft)	43 m (141 ft)		35 m (115 ft)
	Discharge Volume	115 L/min (30 USG/min)	135 L/min (36 USG/min)	280 L/min (73 USG/min)	115 L/min (30 USG/min)
	Max. Suction Lift	8 m (26 ft)			
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine			Forced Air-cooled 2-stroke Gasoline Engine
	Model	Honda GX25	Honda GXH50		MEiKi Power TUE26
	Displacement	25 cc	49.4 cc		25.6 cc
	Rated Output	—			
	Max. Output	0.72 kW (1.0 PS) / 7000 rpm	1.6 kW (2.2 PS) / 7000 rpm		1.03 kW (1.4 PS) / 7500 rpm
	Fuel	Automotive Unleaded Gasoline			2 Stroke Mixed Gas and Oil (50:1)
	Fuel Tank Capacity	0.53 L (0.14 USG)	0.77 L (0.20 USG)		0.6 L (0.16 USG)
	Continuous Operating Time	Approx. 1 hr		Approx. 2 hrs	Approx. 1 hr
	Starting Method	Recoil Starter			
Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set				
Net Weight	5.5 kg (12.1 lbs)	11.5 kg (25.4 lbs)		5.0 kg (11.0 lbs)	
Gross Weight	7 kg (15.4 lbs)	13.5 kg (29.7 lbs)		6.5 kg (14.3 lbs)	
Dimensions L×W×H (mm)	375 × 243 × 320	455 × 302 × 447		330 × 245 × 325	
Packing Unit	1				