


## Great Durability

- Pump up to 20mm water level
- Easy maintenance



### Solid Sizes



PX-55022

## For Residual Water Up to 1 mm Water Level

Designed for application in narrow access drainage especially in manhole or bottom pit.




PXL-52522

### Applications

- Drainage of underground water
- Disposal of residual water from roof tank of buildings, swimming pools, etc.
- Construction site
- Pond / Aquarium usage
- Irrigation
- Home / Domestic application

\*For clear water only

### Performance Curve

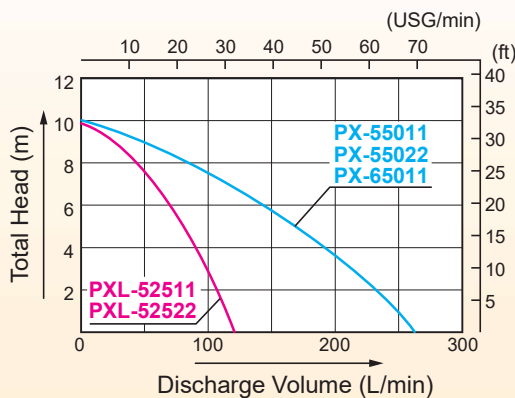

## Invertible Delivery Flange

Just 2 bolts delivery flange is inverted



### Specification

Model		PX-55011	PX-55022	PX-65011	PXL-52511	PXL-52522
PUMP	Connection Dia	50 mm (2")			25 mm (1")	
	Total Head	10 m (32.8 ft)				
	Discharge Volume	260 L/min (68 USG/min)			120 L/min (31 USG/min)	
MOTOR	Voltage	AC 110 V	AC 220 V	AC 110 V		AC 220 V
	Frequency	50 Hz		60 Hz	50 Hz	
	Rated Current*1	6.5 A	3.2 A	6.5 A	6.0 A	2.9 A
	Output	400 W			590 W	540 W
	Consumption	580 W	620 W	700 W	590 W	540 W
	Revolution	2900 rpm		3400 rpm	2900 rpm	
	Type	Condenser Induction Motor				
Power Cord		10 m (32.8 ft)	5 m (16.4 ft)	6 m (19.7 ft)	10 m (32.8 ft)	
Standard Accessories		1 Hose Band, 1 Rope (5 m (16.4 ft)), 1 Hose Nipple		1 Rope (5 m (16.4 ft))	1 Hose Band, 1 Hose Nipple, 1 Coupling, 1 Coupling Packing, 1 Rope (5 m (16.4ft))	
Net Weight		11 kg (24.2 lbs) (1 unit)			12.7 kg (28 lbs) (1 unit)	
Gross Weight		25 kg (55.1 lbs) (2 units)			30 kg (66.1 lbs) (2 units)	
Dimensions L×W×H (mm)		490 × 248 × 409		508 × 259 × 380	505 × 260 × 417	
Packing Unit					2	

\*1 Starting current is three times higher than rated current.