


Clear Water Pumps



SEV-50X

Performance Curve

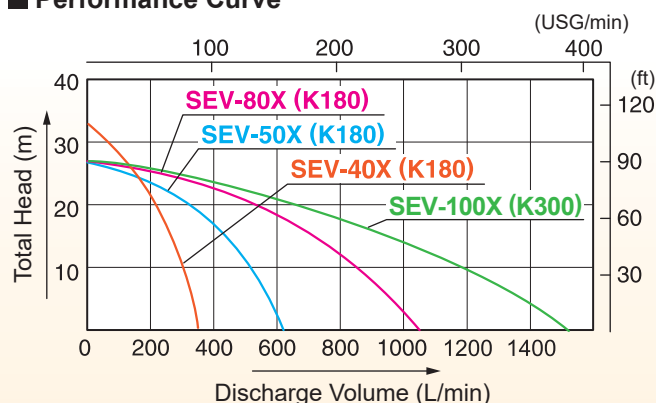

SEV-80X

Specification

Model		SEV-40X*	SEV-50X	SEV-80X	SEV-100X
PUMP	Connection Dia	40 mm (1½")	50 mm (2")	80 mm (3")	100 mm (4")
	Connection Thread	Outer Pipe Thread BSP or NPT			Outer Pipe Thread BSP
	Total Head	33 m (108 ft)	27 m (88 ft)		28 m (91 ft)
	Discharge Volume	340 L/min (90 USG/min)	620 L/min (163 USG/min)	1050 L/min (277 USG/min)	1500 L/min (396 USG/min)
	Max. Suction Lift	8 m (26 ft)			
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine			
	Model	Koshin K180			Koshin K300
	Displacement	179 cc			301 cc
	Rated Output	3.1 kW (4.2 PS) / 3600 rpm			5.0 kW (6.8 PS) / 3600 rpm
	Max. Output	3.5 kW (4.8 PS) / 3600 rpm			6.0 kW (8.2 PS) / 3600 rpm
	Fuel	Automotive Unleaded Gasoline			
	Fuel Tank Capacity	3.6 L (0.95 USG)			5.9 L (1.55 USG)
	Continuous Operating Time	Approx. 2.6 hrs		Approx. 2.4 hrs	Approx. 1.8 hrs
Starting Method	Recoil Starter				
Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set				
Net Weight	26.5 kg (58.4 lbs)	25.2 kg (55.5 lbs)	27.4 kg (60.4 lbs)	54.9 kg (121.0 lbs)	
Gross Weight	29.0 kg (63.9 lbs)	27.2 kg (59.9 lbs)	29.4 kg (64.8 lbs)	64.3 kg (141.8 lbs)	
Dimensions L×W×H (mm)	554 × 406 × 424	504 × 405 × 411	543 × 425 × 425	718 × 525 × 675	
Packing Unit	1				

*Japanese Domestic Model