


PERFORMANCE CURVE

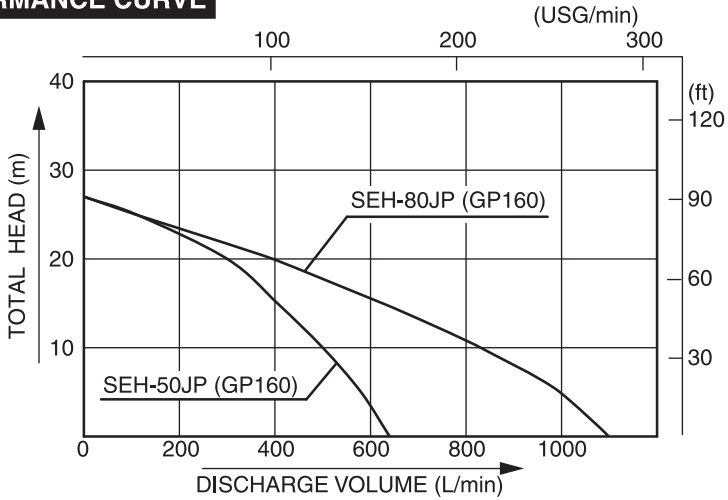

Note: Performance ratings are guaranteed minimum, not inflated maximum.

SPECIFICATIONS

Model		SEH-50JP	SEH-80JP	
PUMP	Connection Dia	50 mm (2 in)	80 mm (3 in)	
	Connection Thread	BSP Thread		
	Total Head	27 m (88 ft)		
	Discharge Volume	640 L/min (169 USG/min)	1100 L/min (290 USG/min)	
	Max. Suction Head	8 m (26 ft)		
ENGINE	Model	HONDA GP160		
		Forced Air-cooled 4-stroke Gasoline Engine		
	Exhaust Volume	163 cm ³		
	Output	Rated Power	2.9 kW (3.9 PS) / 3600 rpm	
		Max. Power	3.6 kW (4.9 PS) / 3600 rpm	
	Fuel	Automotive Unleaded Gasoline		
	Fuel Tank Capacity	3.1 L (0.8 gal)		
	Continuous Operating Time	Approx. 2.5 hrs	Approx. 2.2 hrs	
Starting Method	Recoil Starter			
Standard Accessories	1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set			
Net Weight	24.0 kg (52.9 lbs)	26.1 kg (57.5 lbs)		
Gross Weight	26.0 kg (57.3 lbs)	28.8 kg (63.5 lbs)		

- For the purpose of improvement, specifications are subject to changes without notice.
- Self-priming performance may decrease due to atmospheric pressure or outside air temperature. If self-priming lift is not enough, add priming water to pump casing.