

Suitable for Transferring Kerosene & Diesel

- 10 minutes to empty 200 L drum.
- Easy to use gun nozzle.
- Suction pipe with mesh strainer.

Applications

- Kerosene
- Diesel



* Gasoline must not be used.

Specification

Model	FP-25	FP-2512	SFP-2518*3	FQ-25
Connection Dia	25 mm (1")			16 mm (0.6")
Total Head	3.5 m (11 ft)	2.8 m (9 ft)	3.5 m (11 ft)	2.0 m (6.6 ft)
Discharge Volume	20 L/min (5.3 USG/min)	18 L/min (4.7 USG/min)	20 L/min (5.3 USG/min)	10 L/min (2.6 USG/min)
Voltage	AC 100 V AC 220 V	DC 12 V	DC-18V 2.0Ah (Li-ion)	4 Alkaline D batteries (LR20) or 4 D rechargeable batteries (Nickel-metal hydride battery/HR20)
Frequency	50 Hz / 60 Hz			—
Charging time *1	—		Approx. 70 min	—
Operating time *2	—		Approx. 90 min	1000 L *4
Power Code	4 m (13 ft)			—
Suction Pipe	950 mm			864 mm
Delivery Hose	ø25 mm × 1.5 m			ø27 mm × 1.5 m
Net Weight	2.7 kg (6.1 lbs)	2 kg (2.2 lbs)	1.8 kg (3.9 lbs)	0.83 kg (1.8 lbs)
Gross Weight	3.8 kg (8.3 lbs)	3.1 kg (6.8 lbs)	3.4kg (7.4lbs)	—
Dimensions L×W×H (mm)	1180 × 225 × 115		1155 × 220 × 120	1350 × 116 × 93
Packing Unit	1			

*1 May differ depending on temperature or remaining battery power. *2 At full charge, no load.

*3 Japanese Domestic Model. *4 With 0 m (0 ft) head.



FP-25

For High Viscosity Oil (Up to 2000 cSt)

Specially designed for dispensing oil at service stations.

Applications

- High viscosity oil



SO-25

Specification


Model	SO-25
Discharge Volume	0.5 L/Stroke (0.1 USG/Stroke)
Suction Pipe	1038 mm
Net Weight	5.1 kg (11.2 lbs) (1 unit)
Gross Weight	35 kg (77 lbs) (5 units)
Dimensions L×W×H (mm)	1420 × 300 × 165
Packing Unit	5

High Volume

- Delivers 1 L per rotation.
- Mesh strainer can filter fine dust.
- Applicable for low viscosity oil.

Applications

- Diesel
 - Kerosene
 - Heavy fuel oil A
- *Oil temperature is over 10°C

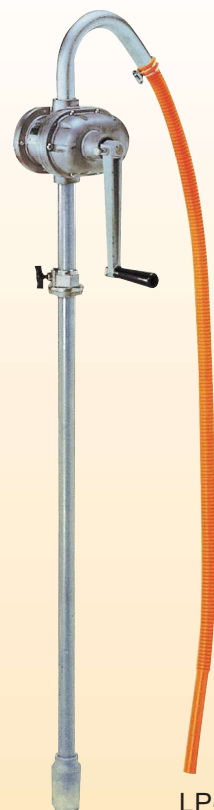

LP-32

Specification

Model	LP-32
Discharge Volume	1 L / 1 Rotation, (Normal Use) 100 L/min (26 USG/min)
Suction Pipe	ø32 × 956 mm
Delivery Hose	ø32 × 1280 mm
Strainer	#60 with Mesh, Polyethylene
Net Weight	8 kg (17.6 lbs) (1 unit)
Gross Weight	33.5 kg (73.8 lbs) (5 units)
Dimensions L×W×H (mm)	1127 × 242 × 280
Packing Unit	5