



Suitable for Sprinkler (System) & General Irrigation



SERH-50B



Performance Curve

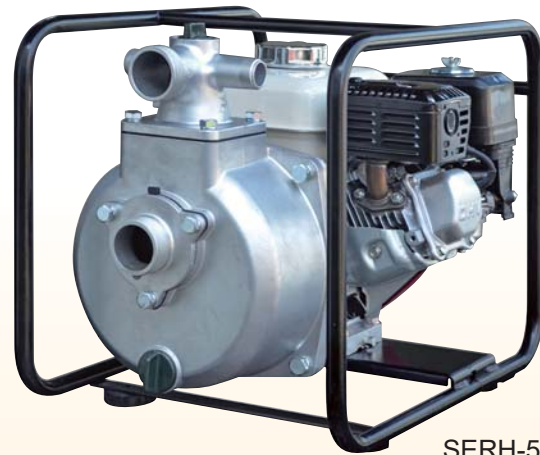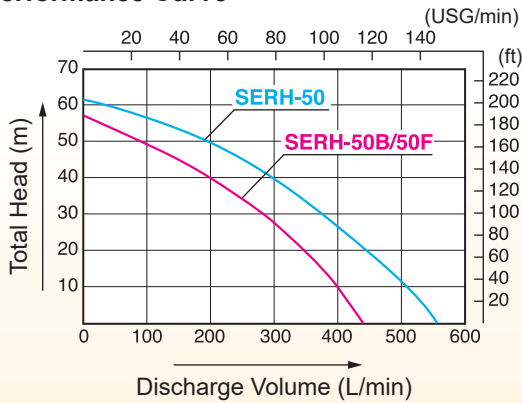

SERH-50F

Specification

Model		SERH-50B	SERH-50	SERH-50F
PUMP	Connection Dia	50 mm (2")	65 mm (2½")	50 mm (2")
	Discharge	50 mm (2")		50 mm (2") / 25mm (1") × 2
	Connection Thread	Outer Pipe Thread BSP or NPT		
	Total Head	57 m (187 ft)	62 m (203 ft)	57m (187 ft)
	Discharge Volume	440 L/min(116 USG/min)	560 L/min (148 USG/min)	440 L/min (116USG/min)
	Max. Suction Lift	8 m (26 ft)		
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine		
	Model	Honda GX160	Honda GX240	Honda GX160
	Displacement	163 cc	270 cc	163cc
	Rated Output	2.9 kW (3.9 PS) / 3600 rpm	4.6 kW (6.3 PS) / 3600 rpm	2.9 kW (3.9 PS) / 3600 rpm
	Max. Output	3.6 kW (4.9 PS) / 3600 rpm	5.9 kW (8.0 PS) / 3600 rpm	3.6 kW (4.9 PS) / 3600 rpm
	Fuel	Automotive Unleaded Gasoline		
	Fuel Tank Capacity	3.1 L (0.82 USG)	5.3 L (1.40 USG)	3.1 L (0.82 USG)
	Continuous Operating Time	Approx. 2 hrs	Approx. 2.5 hrs	Approx. 2 hrs
	Starting Method	Recoil Starter		
	Standard Accessories	2 Coupling Set 3 Hose Bands (ø60) 1 Strainer 1 Engine Tool Set	1 Coupling Set (50 mm) 1 Coupling Set (65 mm) 2 Hose Bands (ø80) 1 Hose Band (ø60) 1 Strainer (65 mm) 1 Engine Tool Set	1 Coupling Set (50mm) 1 Check Plate (50mm) 2 Check Coupling Set (25mm) 2 Hose Nipple (ø25) 1 Engine Tool Set
Net Weight	31 kg (68.3 lbs)	44 kg (97 lbs)	31 kg (68 lbs)	
Gross Weight	34 kg (74.9 lbs)	46 kg (101 lbs)	34 kg (74.9 lbs)	
Dimensions L×W×H (mm)	535 × 405 × 440	568 × 482 × 518	535 × 405 × 455	
Packing Unit	1			